

Intermediate Bulk Container
packaging | storing | transporting

Equipment



www.theolivecentre.com



Multi Dumper™ ***MD-1002***

Multi Dumper™ is a machine which can remove material and place it into your material handling system quickly and affordably.

The machine can work both with Multitank, pallet boxes up to 600 liters and typical 220 liters drums.

Specifications

- Lift and Rotation Capacity: 500 kg
- Dump Rotation: 135° to 45° Discharge
- Hydraulic Discharging System
- Joystick Control
- Oil Level indicator
- 3 Kw
- Aisi 304 body frame
- Ip 65 plastic electrical board
- Transporting Wheels



Multi Tipper™


MD-1003

Multi Tipper is an accessory that can be applied to forklift trucks. It is ideal for turning upside down and moving Multitanks. Two hooks lock Multitank safely and allow it to be turned upside down with a single move.

It has adjustable forks which allow use for Multitank or any other pallets or containers.

This model is made of stainless steel and is recommended for all kinds of food and non food sectors.

A	Length	mm	1450
B	Width	mm	930
C	Height	mm	750
D	Fork base	mm	420 ÷ 750
E	- Height of containers	mm	400 ÷ 1150
H	- Barycentre without load	mm	280
G	- Barycentre of the load	mm	500
I	- Thickness	mm	350
Q	- Tilting angle	-	165
Q	- Maximum load (during transfer)	Kg	1500
-	- Operating capacity (during tilting)	Kg	1200
-	- Operating pressure	bar	140
-	- Weight	Kg	327
-	- Required hydraulic lines	n.	2 (1 d.c. lever)
-	- Adjustable forks		150x40 L=1080

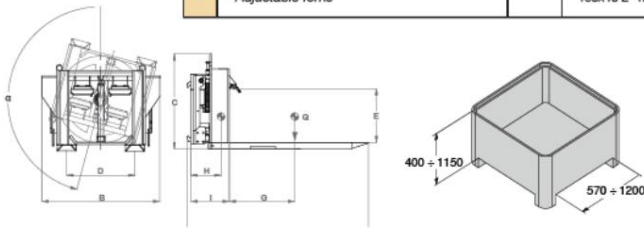

Multi Truck

PT-420

Multi Truck™

Specifications

Code : PT-420

Multi Truck lifts and moves Multitanks easily and safely.

It is a 4-way entry hand pallet truck that allows the operator to handle Multitank even from its narrow side providing alternatives when using Multitanks in warehouse environments.

- Fork length: 1200mm
- Fork width: 340 mm
- Max load capacity: 1200 kg
- Hydraulic pump
- Transporting Wheels
- 4 way entry



Multi Washer

MD-1004

Multi Washer is a full automatic equipment washing one complete Multitank (body and lids). 304L stainless steel welded construction.

Adjustable leveling feet.

Manually operated side hinged access door with electrical safety interlock.

Motorized bin loader mechanism controlled by "press to operate" buttons.

Lids are manually loaded into the wash chamber cassette.

External bin wash utilizing fixed position spray jet systems.

Internal bin wash utilizing IWM Rota Jet systems

Internal and external bin rinse utilizing rotary nozzle systems

Lid wash via standard rotary arm type jets.

Rinse main water inlet fitted with 1" solenoid valve.

Specifications:

- Capacity: Up to 700 liters with overflow port and drain valve
- Pump Size: 15 kw with inlet filter
- Automatic water make-up via sensors and a 1" electrical solenoid valve
- Low level water protection for heaters


Filter:

Wash section fitted with one standard lift out basket mesh filter.

Filter accessible from side machine abutment via removable lid

Heating:

Electric via 2 x 18kw immersion heaters

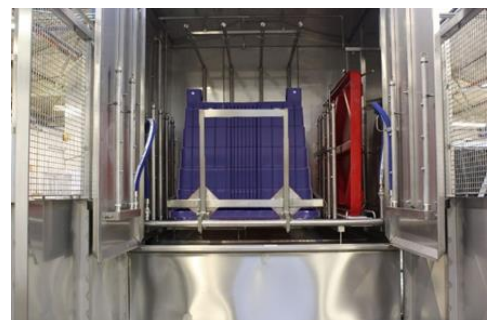

Multitank™

sustainable solution



Australian Agent
74 Castle Road, Cabarlah QLD 4352

T: +61 7 4696 9845
www.theolivecentre.com

