




BASIC

The Basic malaxer provides all the essential functions required for the malaxing stage, maintaining a straightforward and user-friendly design. This practical and functional model is crafted to meet the fundamental needs of olive oil production facilities.

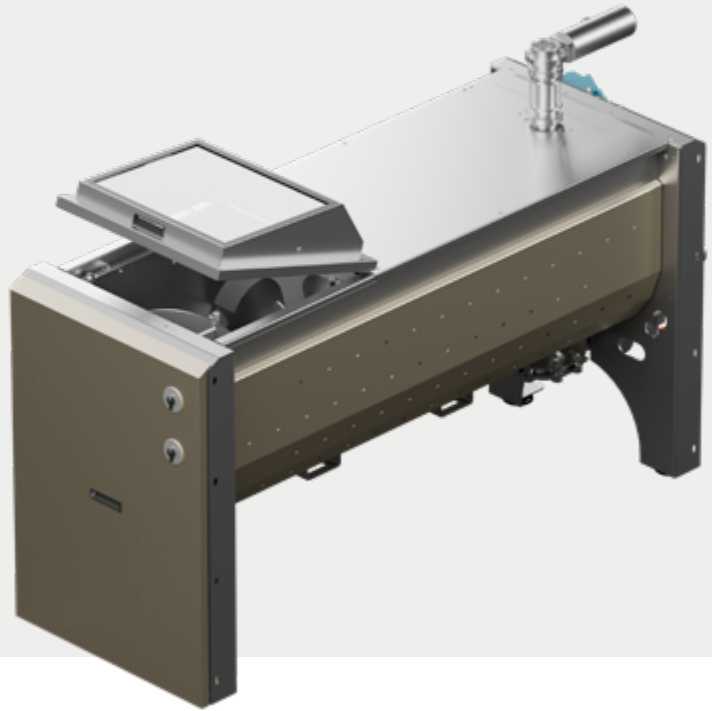

→ FEATURES

- Electric gear motor
- Manual butterfly valve for loading and unloading
- Panoramic anti-fog glass with manual opening
- LED lighting system
- Temperature sensors
- Level sensor
- Manual quick rinse system
- Individual hot water circulator for each tank

→ TECHNICAL DATA

Capacity (liters)	550 750 950 1150	1500 2000 2500
Electric motor (kw)	1.5	2.2
Material	AISI 304	AISI 304
Model	GR-B	GR-25
Width (mm)	850	1190
Length (mm)	1980 2450 3020 3520	2660 3740 3800
Height (mm)	1200	1780
Weight (kg)	700	1000
Voltage (Vac)	400	400
Frequency (Hz)	50	50
Power Supply Line	3F+T	3F+T